





Important: Read All Instructions Prior to Installation

Function introduction

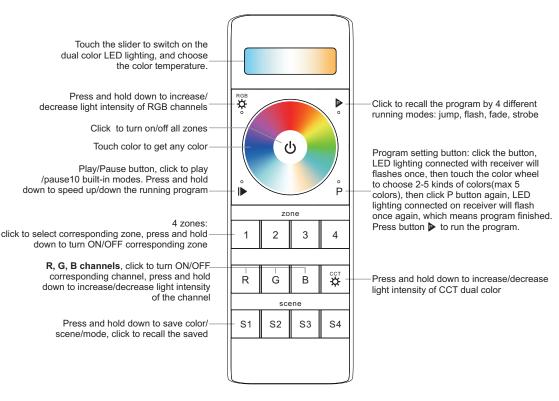

Front side

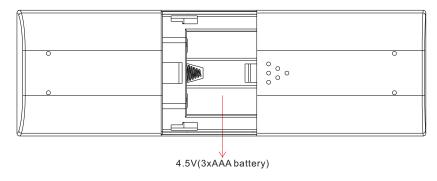

Back side

Product Data


Output	RF signal
Operation Frequency	869.5/916.5/434MHz
Power Supply	4.5V(3xAAA battery)
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimensions	153x52x19mm

- · Control 4 zones of RF receiver
- RGB+CCT color controller
- · Compatible with universal serie RF receiver
- 1 receiver can be paired by max 8 different remote controls.
- · Waterproof grade: IP20


Safety & Warnings

- · This device contains AAA batteries that shall be stored and disposed properly.
- DO NOT expose the device to moisture.


Pair with RF receiver(Method 1)

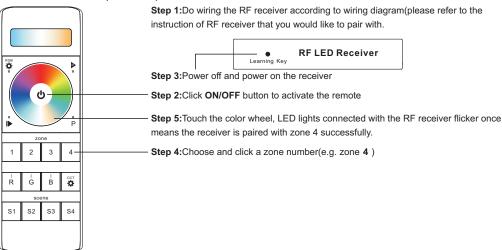

Pair with RF receiver(Method 2)

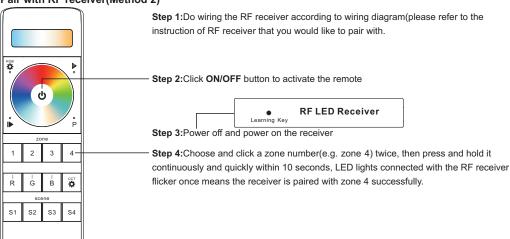

Program the running mode

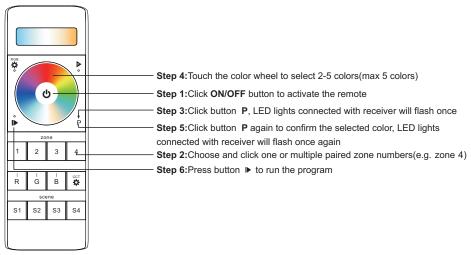

If you use multiple receivers, you have two choices:

Option 1: have all the receivers in the same zone, like zone 1



Option 2: have each receiver in a different zone, like zone 1, 2, 3 or 4



How to stop running mode of single color LED light caused by RGBW sender interference:

- 1. When pairing single color LED light to a single color remote, it might be interfered and paired by nearby RGBW senders, which might control the single color light into running mode. The running mode can not be stopped by the paired single color remote or by delete pairing.
- 2. Then we need this remote, and pair the remote to the receiver via above "Pair with RF receiver (Method 2)", then touch the color wheel to stop the running mode.
- 3. Then delete pairing and pair the receiver to the single color remote again, it can be controlled by the remote again.